

The logo for the company 'Nice' is located in the top left corner. It consists of a dark blue square with the word 'Nice' written in white, sans-serif font.

Nice

Commercial Door Operators



MCX

Designed to Adapt, Built to Perform: The Next Generation of Nice Commercial Door Operators

MCX, the new standard in commercial door automation. Designed from the ground up with a versatile modular platform that delivers power, speed, and effortless set up and control. MCX handles commercial doors with unmatched precision, ease of use, and long term reliability.

Simplified installation and configuration.


- Floor level programming with the MCX Control Station
- Retrofit ready: optional mounting plates fit legacy CDO footprints
- Field reversible handing—fewer variants to stock and carry

Connect, control, update.

- Built-in Bluetooth and Wi-Fi
- Nice G.O. app for end users
- Over The Air firmware updates
- UL325

One SKU. Every voltage.

- Auto-detects 120V–240V, single or three-phase with no jumpers to set
- Extends to 480/600V via optional transformer kit—no dedicated high-voltage SKU needed

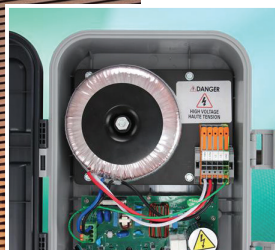

MV00540
**Optional 480/600V
Input Voltage
Transformer Kit**



MV00541
**Optional
Electromechanical
Brake Kit**



MCX Control Station

Unprecedented control and programming right at the Control Station

- Fast installation and set up for open/close speed, timers, limits, and much more
- Easily adjust settings and access diagnostics
- NEMA 4-rated enclosure
- High resolution screen



MCX FEATURES

- Quick-release, removable front cover and lever-actuated terminals enable fast, tool-free access and wiring
- Fast 12"/sec average door speed, adjustable to suit installation requirements
- Operator sprocket (50B12) and roller chain included



MCX-J

Jackshaft operator with manual disconnect.

- 1/2 HP
- Bluetooth & Wi-Fi
- MCX Control Station
- Auto Voltage Detection



MCX-H

Jackshaft operator with manual chain hoist.

- 1/2 or 1 HP
- Bluetooth & Wi-Fi
- MCX Control Station
- Auto Voltage Detection
- Reversible Handling




MCX-GH

Extended-duty jackshaft operator with manual chain hoist.

- 1 HP
- NEMA-1 or NEMA-4 enclosure
- Extended duty cycle
- Bluetooth & Wi-Fi
- MCX Control Station
- Auto Voltage Detection
- Reversible Handling

Smart Control at Your Fingertips

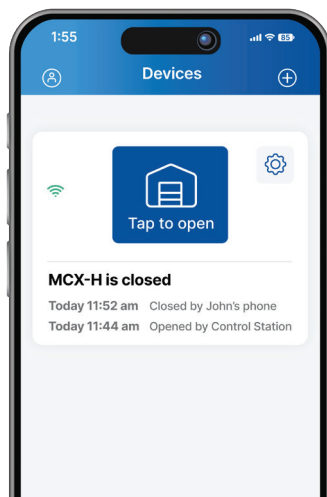

Nice G.O. App

- Advanced real-time monitoring and control of commercial doors from any mobile device.
- Assign custom access and permissions for authorized users
- Schedule door and light operation



4.7 Star User Rating

Jackshaft Operators



PRO-J // PRO-H // PRO-HBH

Industrial, continuous duty belt drive jackshaft operator for high lift, vertical lift sectional doors, and rolling doors.

- Continuous duty industrial motor
- Full feature logic board controls
- Heavy duty 5L V-belt and #41 roller chain and sprocket reductions
- Permanently lubricated ball bearings on all drive shafts
- 1" output shaft on final drive
- Full overload protection
- Adjustable friction clutch
- Magnetic solenoid brake (standard on PRO-HBH, optional for PRO-J, PRO-H)
- Mechanical braking system (PRO-J, PRO-H)
- #50 roller chain drive and sprockets
- J incorporates a floor level disconnect; H and HBH incorporate a floor level disconnect with emergency chain hoist, all with electrical cut-out switch
- Left or right hand mounting (PRO-H, PRO-HBH)
- UL325

PRO-EJ // PRO-EHJ

Industrial, continuous duty belt drive jackshaft operator for rolling doors and grilles. Built-in mechanical load sensing feature and emergency egress.

- Continuous duty industrial motor
- Logic board controls
- Permanently lubricated ball bearings on all drive shafts
- Built-in mechanical load sensing mechanism to eliminate jamming and damage to a locked rolling grille and door operator
- Emergency egress capability; floor level disconnect allows for opening a grille by manual operation or by door spring tension
- Emergency chain hoist with floor level disconnect and electrical cut-out manual operation (EHJ)
- #50 roller chain drive and sprockets
- UL325



PRO-GH // PRO-GHC

Industrial, continuous duty worm gear drive jackshaft operator with chain hoist for large high lift, vertical lift sectional doors and rolling steel doors.

- Continuous duty industrial motor up to 5 HP
- Full feature logic board controls
- Primary drive worm gear speed reducer in oil bath
- Full overload protection
- Adjustable in-line friction clutch (Optional)
- Magnetic solenoid brake standard
- #50 roller chain drive and sprockets
- Reinforced frame and cast iron pillow block bearings (PRO-GHC)
- Emergency chain hoist with electrical cut-out switch for manual operation
- Universal left or right hand mounting.
- UL325

Jackshaft Operators

PRO-GJ

Medium duty gearhead jackshaft for small rolling doors, shutters and grilles.

- High starting torque motor with thermal protection
- Logic board controls
- Worm gear in oil bath reducer
- #41 roller chain drive and sprockets
- Floor level disconnect or emergency manual operation
- Left and right hand mounting (must specify)
- UL325



PRO-LJ // PRO-LH // PRO-LHA

Medium Duty belt drive jackshaft operator for High lift, vertical lift sectional doors and small rolling doors and grilles.

- High starting torque 1/2 HP motor with thermal protection
- Logic board controls
- Heavy duty 4L V-belt and #41 roller chain and sprocket reductions
- Permanently lubricated ball bearings on all drive shafts
- 1" output shaft on final drive
- Adjustable friction clutch
- Left or right hand mounting (PRO-LH, PRO-LHA)
- Magnetic solenoid brake (std on PRO-LJ, PRO-LH, optional on PRO-LHA)
- Mechanical braking system (PRO-LHA)
- #41 roller chain drive and sprockets
- LJ incorporate a floor level disconnect, LH & LHA incorporate a floor level disconnect with emergency chain hoist, all with electrical cut-out switch
- UL325




PRO-1461J

The compact jackshaft operator for light commercial sectional doors with light duty cycle requirements.

- Ideal for light commercial doors with light duty cycle requirements
- Compact design makes installation directly onto the shaft of a sectional door simple and fast
- Simplified connectivity between the control unit and optional accessories
- Compatible with sectional doors up to 14' tall and 850 lbs.
- Rigorous testing and quality control processes ensure long-term dependability
- Dry contact and light terminals to indicate when door is in full open position and for control of external lights
- Compact unit mounts next to the door
- 3 button O/C/S push button station
- UL325

Trolley Operators

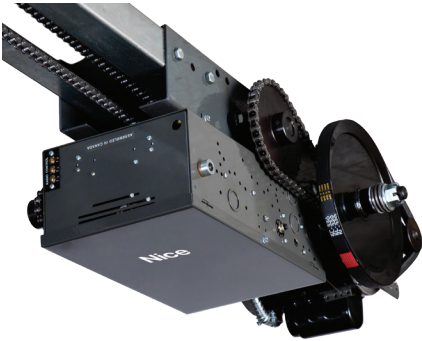

PRO-T


Commercial / Industrial Continuous Duty Belt Drive Trolley Operator.

- Continuous duty industrial motor
- Full feature logic board controls
- Heavy duty 5L V-belt and #41 roller chain and sprocket reduction
- Permanently lubricated ball bearings on all drive shafts
- 1" output shaft on final drive
- Full overload protection
- Adjustable friction clutch
- Sliding door application and hardware (PRO-SD)
- Magnetic solenoid brake standard on PRO-TB and PRO-SD
- #410 roller chain drive on 1/2 HP PRO-T and PRO-TB models
- #41 roller chain drive on 3/4, 1 HP PRO-T and PRO-TB
- UL325

PRO-APT

Commercial / Industrial Continuous Duty Belt Drive Apartment Trolley Operator.

- Continuous duty industrial motor
- Full feature logic board controls
- Full overload protection
- Adjustable friction clutch
- Magnetic solenoid brake (optional PRO-APTb)
- 3/4" and 1" pillow block bearings on pulley and drive shaft
- Heavy duty trolley idler c/w 41B12 sprocket
- Low profile 9" clearance design for apartment applications
- Red and Green lights feature (optional)
- Quick disconnect trolley carriage
- UL325

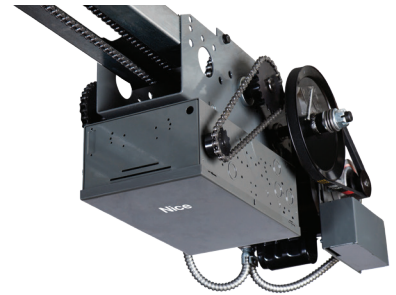

Trolley Operators



PRO-GT // PRO-GSD

Commercial / Industrial Continuous Duty Worm Gear Trolley Operator.

- Continuous duty industrial motor up to 2 HP
- Full feature logic board controls
- Primary reduction worm gear speed reducer in oil bath, secondary reduction #41 roller chain and sprockets
- Permanently lubricated ball bearings on all drive shafts
- 1" output shaft on final drive
- Full overload protection
- Adjustable in-line friction clutch
- Magnetic solenoid brake standard
- #41 roller chain drive
- Emergency quick release disconnect for manual operation
- Sliding door application and hardware (PRO-GSD)
- UL325

PRO-LT

Commercial Medium Duty Belt Drive Trolley Operator.

- High starting torque motor with thermal protection
- Logic board controls
- Heavy duty 4L V-belt and #41 roller chain and sprocket reductions
- Permanently lubricated ball bearings on all drive shafts
- 1" output shaft on final drive
- Adjustable friction clutch
- Emergency quick release disconnect for manual operation
- #410 roller chain drive and sprockets
- Magnetic solenoid brake (optional)
- UL325



The logo consists of a solid blue square with the word "Nice" in white, bold, sans-serif font centered within it.

Nice

Nice,
a world without limits.

Niceforyou.com

Nice North America Corporate Office

5919 Sea Otter Place, Suite 100
Carlsbad, CA 92010
Tech Support: (514) 822-1116
Sales: (760) 438 7000

Nice North America Door Division

1380 St-Regis Dorval, Quebec, Canada
H9P-2T5
Tel: (514) 822 1116

